



Integrated LED Wall Light Installation Instructions

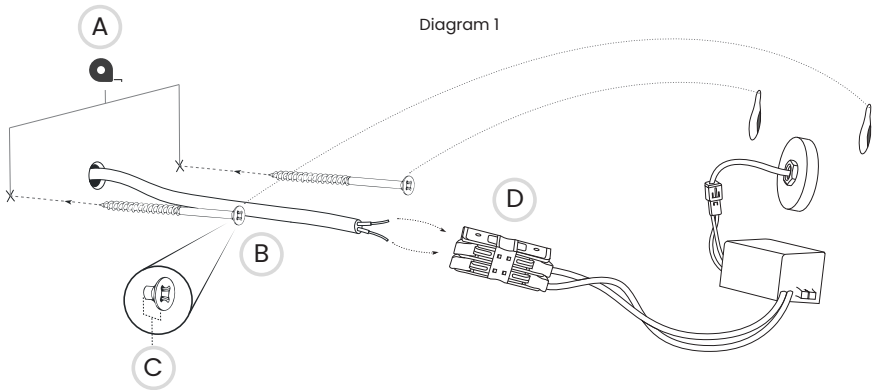

- Mounting Screws Spacing Key

- Urchin Wall Uplighter - 60mm
- Urchin Wall Light - 60mm
- Artus Tall Wall Light - 60mm
- Cape Wall Light - 50mm
- Wake Wall Light - 76mm

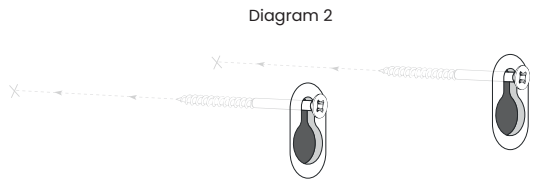

Only a qualified electrician should assemble the luminaire. If in doubt, consult a suitably qualified electrician. Installation MUST be carried out in accordance and compliance with current building regulations.

Ensure the electrical supply is turned OFF at the fuse board.

1. Identify if there are any hidden pipes or electrical cables in the wall to avoid causing damage or risk of electrical shock during installation. Make two marks on the wall centred to the electrical supply wire **(A) referring to the  spacing key above, depending on your chosen wall light. It is crucial that the marks are exactly  apart, otherwise the backplate for the wall light will not correctly align with the mounting screws.** Drill two holes where you have marked. You may need to determine the fixing method appropriate to the wall structure (plasterboard fixings or Rawl plugs for example). Using a Pozidriv (PZ2) screwdriver, carefully tighten the screw (B) until the screw head is approximately 4mm proud of the surface of the wall (C). Do the same for the other screw.
2. Connect the light to the electrical supply using the connector included (D). Hold the backplate up to the wall and locate the screw heads into the tear-drop shaped holes before pulling the plate down slightly to lock into place (Diagram 2).
3. Turn the power supply on to complete installation.

*** If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. ***

For more information on the installation of your product: **sales@tomraffield.com +44 (0)1326 722725**